
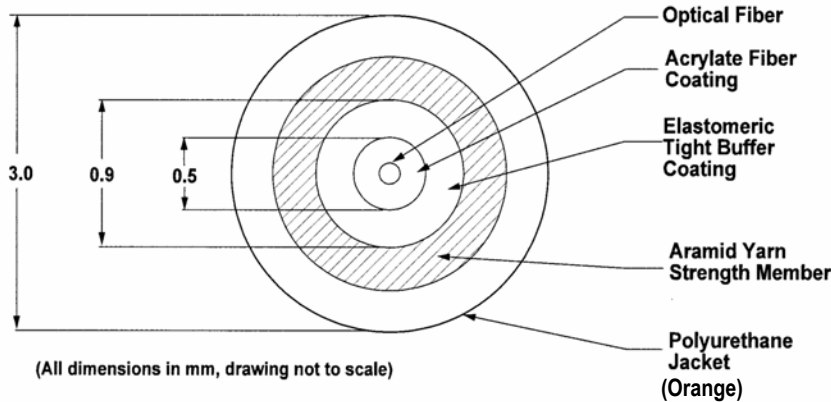


## Product

Micronor's M06 optical cable is a proven rugged and robust optical link solution for deploying the ZapFREE® Fiber Optic Rotary Encoder System in a broad range of industrial and outdoor applications. It is an extremely strong, lightweight, rugged tight-buffered cable designed originally for military tactical field use.

The cable is designed to be crush resistant, resilient, and offers exceptional mechanical protection for the internal optical fiber. It is extremely flexible and can withstand repetitive flexing and motion found in elevator and robotic applications.

The polyurethane jacket offers exceptional abrasion, cut, chemical and UV resistance. The cable can be deployed in traditional cable tracks and raceways but is rugged enough to be clamped directly to equipment surfaces. Temperature range is -70°C to +85°C.

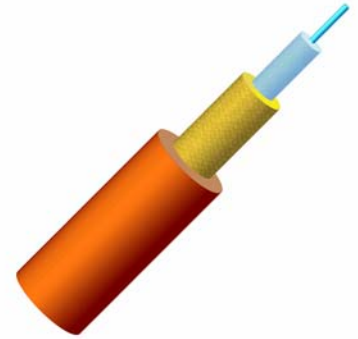


### Cable Properties:

- Duct installation
- Fungus resistant
- UV resistant
- Water resistant
- Direct burial
- Aerial
- High flex life
- Soft and flexible
- Accommodates tight bends
- Mechanical resistant
- Low Friction
- Petrochemical resistant
- Severe chemical environments

## Specifications

Fiber Type	Multimode	
Core/Cladding Diameter	62.5µm / 125 µm	
Primary Coating Diameter	500µm (uv cured acrylate)	
Secondary Coating Diameter	900µm (hard elastomeric)	
Numerical Aperture	0.275	
Proof Test Level	100 kpsi	
Wavelength	850nm	1310nm
Attenuation	3.0 dB/km	1.0 dB/km
Laser bandwidth (MHz-km RML)	220	500
LED Bandwidth	200	500
Cable Weight	8.4 kg/km	
Installation	Max Tensile Load	600 N
	Min Bend Radius	4.8 cm
Operating	Max Tensile Load	350 N
	Min Bend Radius	2.4 cm
Impact Resistance	200 impacts (EIA/TIA-455-25 Military Requirement)	
Crush Resistance	440 N/cm (TIA/EIA-455-41 Military Requirement)	
Temperature	Operating	-55°C to +85 °C
	Storage	-70°C to +85 °C

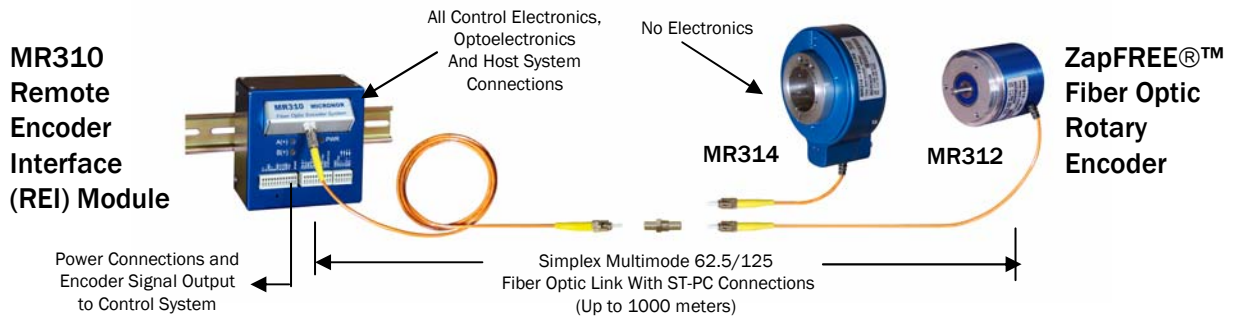

Integrating the ZapFREE® Fiber Optic Rotary Encoder into your motion control system couldn't be simpler:

1. First, verify your link loss design. The standard ZapFREE® Encoder System has a two-way optical loss margin of 6.5 dB. For a typical installation with up to 4 interconnections (at the ST-PC interfaces of the MR310 module and MR312/MR314 encoders plus 2 additional inline breaks) and up to 400 meters end-to-end length, you are already within the optical loss budget. For other combinations of link length and number of interconnections, consult the MR310 ZapFREE® Encoder System User Guide.
2. Mount MR312 rotary encoder to the external equipment. Conventional mounting techniques via standard synchro clamps (also available as Micronor P/N 609920651) or direct panel mounting are shown on the following page. Always use a flexible coupling to connect the encoder's shaft to the equipment's shaft.
3. Locate MR310 REI Module along with other control system's electronics via 35mm DIN rail mount.
4. Make electrical connections (power, ground, quadrature signals, serial interface, etc.) to J1/J2/J3 via the three WAGO Quick-Connect plugs (supplied with the MR310).
5. Connect MR312 Encoder to MR310 REI Module via an ST-PC to ST-PC optical cable assembly.
6. The ZapFREE® Fiber Optic Encoder System is now ready to operate!

## To order industrial-grade cable assembly terminated with ST-PC connectors on both ends for ZapFREE® Encoder System:

**MR320 - M06 L5**

Cable Type: M06 Mil/Ind Grade

Cable Assembly Length (Tip to Tip in Meters) (R = Decimal Point)  
 5 = 5.0 meters  
 5R5 = 5.5 meters

**MICRONOR INC.**  
 3483 Old Conejo Rd. Ste. 203  
 Newbury Park, CA 91320  
 United States of America  
 T: 805.499.0114  
 F: 805.499.6585  
 sales@micronor.com  
 www.micronor.com

## MR320A ST Bulkhead Adapter

**MICRONOR AG**  
 Pumpwerkstrasse 32  
 CH-8105 Regensdorf  
 Switzerland  
 T: +41.44.843.4020  
 P: +41.44.843.4039  
 sales@micronor.ch  
 www.micronor.com