


9600.00.223

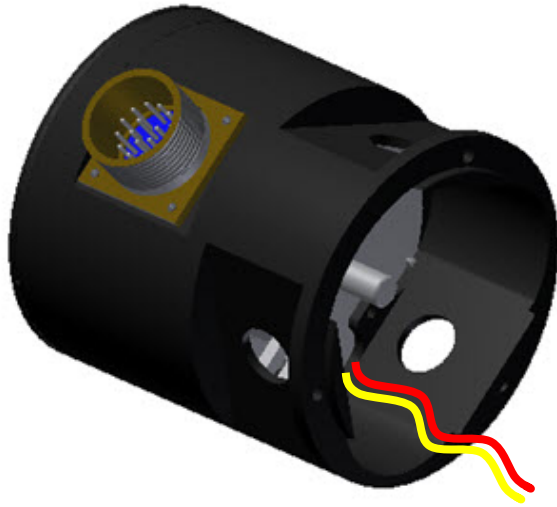

Shown without 3x access port plugs installed

Machine OEM: Cincinnati (CMI)

- Compact Feedback Unit
- Geared Resolver (1:1)
- Leads provided for external Brake Control connection
- Replaces Micron 36-508-424-1685
- Replaces CMI 3377702-2

Performance Specifications

Temperature	-15°C to +60°C
Humidity	0-95% RH, Non-Condensing

Configuration**Resolver**

Micronor P/N	R11XJ107 (Replaces Micron 73-204-671 and Harowe 11BRCX-300-J series)
Gear Ratio	+1:-1
Type	Control Transmitter (Primary=Rotor), Single Speed
Excitation	5000 Hz
Transformation Ratio	0.95

*Specification not to be changed without customer approval**For Sales & Service:*

United States: Tel +1-805-389-6600 Fax +1-805-389-6605 URL www.micronor.com
Switzerland: Tel +41-44-843-4020 Fax +41-44-843-4039 URL www.micronor.ch

Page 1 of 4

20.09.2012
REV.0

9600.00.223

Label:

Position Transducer
 FRL R1=1:1 per TD 9600.00.223
 Replaces Micron 36-508-424-1685

App.Nr. M-XXXXXX

MICRONOR P/N 9600.00.223
 US +1-805-389-6600 sales@micronor.com
 CH +41-44-843-4020 **WWW.MICRONOR.COM**


PLUS standard small Micronor App.Nr label to be installed inside unit.

Electrical wiring

Mounted Receptacle :

MS3102A-20-29P , 17-pin, Male/Pin Receptacle

Mating connector (available separately):
 MS3106A-20-29S, 17-pin, Female/Socket Straight Plug

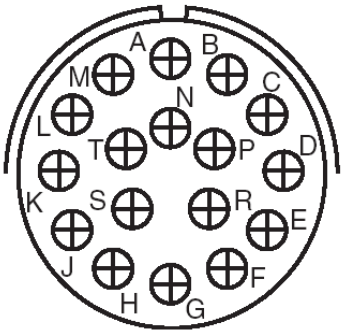


Wire colour	Component	Function	Connector / pin no.
Red/White	R1	Rotor1	A
Black/White	R1	Rotor2	B
			C
Red	R1	S1	D
Yellow	R1	S2	E
Black	R1	S3	F
Blue	R1	S4'	G
			H
			J
			K
			L
			M
			N
			P
			R
Red (wire passes through front for external connection to Motor Brake)			S
Yellow (wire passes through front for external connection to Motor Brake)			T

NOTE: Wire leads to pass through base plate protected by grommet placed near edge of base plate. .

Specification not to be changed without customer approval

9600.00.223

Reference drawing

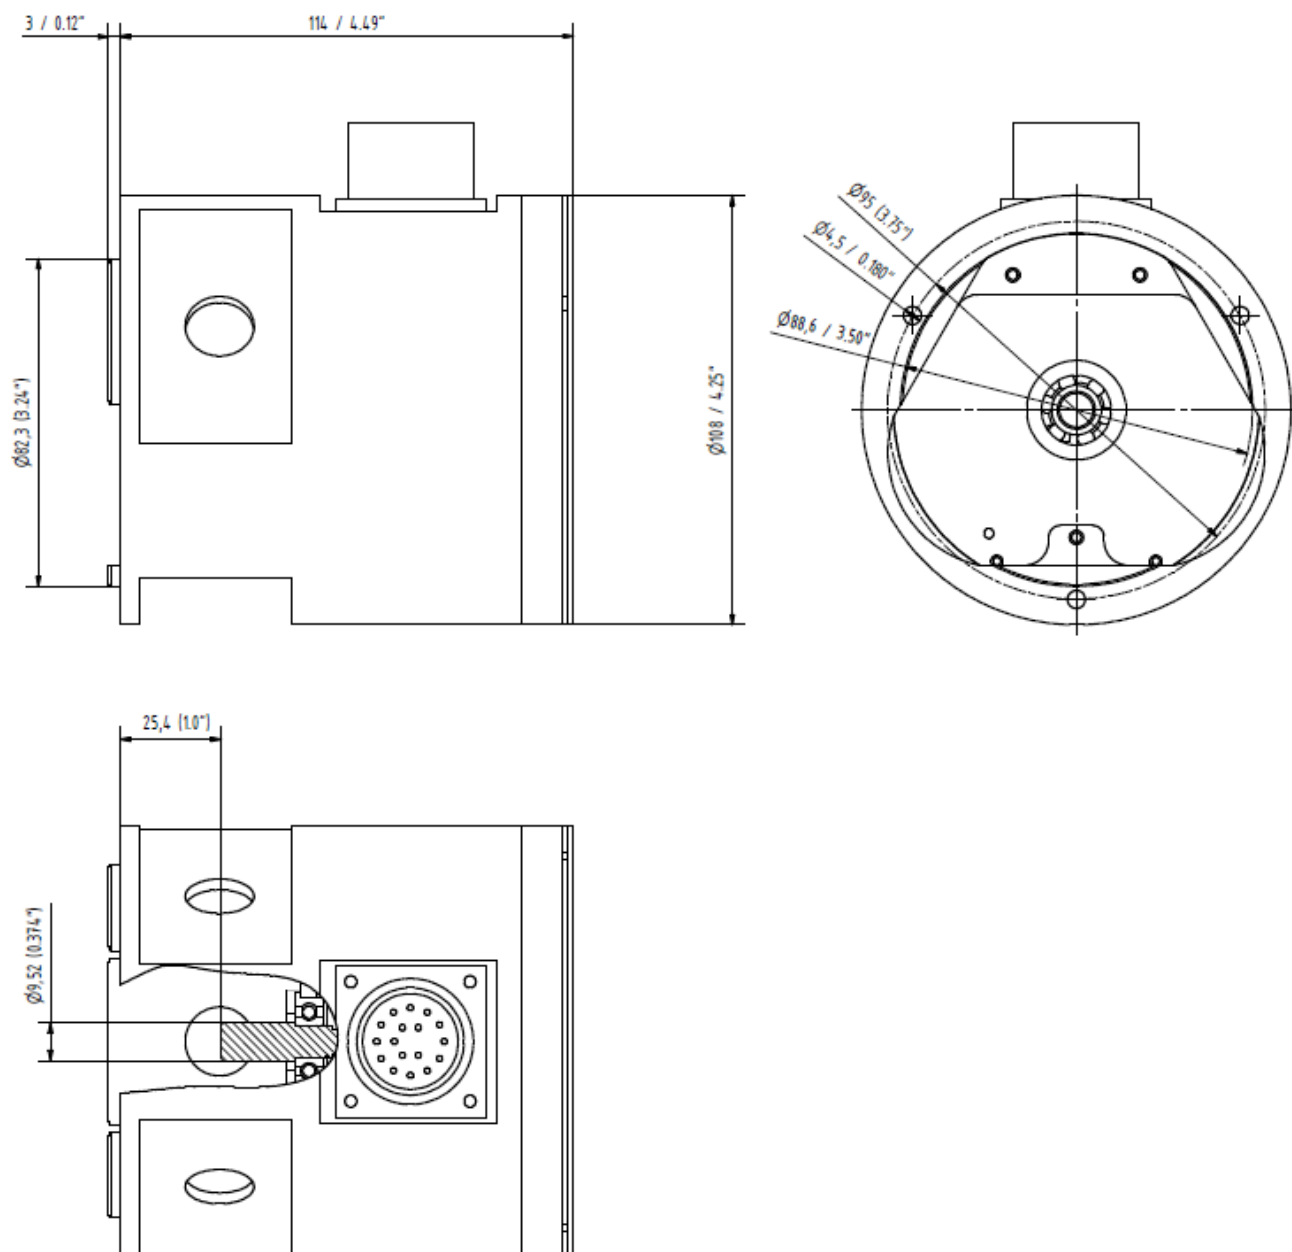

Specification not to be changed without customer approval

For Sales & Service:

United States: Tel +1-805-389-6600 Fax +1-805-389-6605 URL www.micronor.com
 Switzerland: Tel +41-44-843-4020 Fax +41-44-843-4039 URL www.micronor.ch

Page 3 of 4

20.09.2012
REV.0

9600.00.223

Please Sign to Approve:

Name	Compartment	Date / Location
	Mike Kilroy Co. (Customer)	
	Micronor Inc. (Sales)	

*Specification not to be changed without customer approval**For Sales & Service:*

United States: Tel +1-805-389-6600 Fax +1-805-389-6605 URL www.micronor.com
*Switzerland: Tel +41-44-843-4020 Fax +41-44-843-4039 URL www.micronor.ch**Page 4 of 4**20.09.2012**REV.0*